



500VA~90kVA

KEY FEATURES

- Built-in PFC, provide input power factor over 0.98 (full load)
- AC+DC output mode for voltage DC offset simulation
- Programmable voltage, current limit
- Comprehensive measurement capability, V, Hz, Irms, Ipk, linrush, P, VAR, VA, PF, CF of current and etc.
- High output current crest factor, ideal for inrush current testing
- Turn on, turn off phase angle control
- One-key recall for 9 different voltage and frequency
- Programmable slew rate setting for changing voltage and frequency
- Analog input for power amplifier
- Optional Analog programming interface
- Optional GPIB and RS-232 interface (Model 61601~61605)
- Full protection: OP, OC, OV and OT protection
- Easy use graphic user interface: softpanel (option)
- Capable of delivering power output up to 90KVA by implementing Master-Slave operation



The Chroma Model 61600 series Programmable AC Power Source delivers pure, instrument grade AC and DC power at very low cost. The 61600 AC power source offers output voltage from 0 to 300VAC, and frequency from 15 to 1.5kHz. A easy-use software can let users edit an auto-run profile and record the measuring data during the test. It is suitable for commercial, avionics, marine, and military applications from bench-top testing to mass productions.

The 61600 AC power source generates very clean AC output with typical distortion less than 0.3%. With power factor correction circuit, the 61600 AC power source yields higher efficiency and deliver more output power.

Using the state-of-the-art PWM technology, the Chroma 61600 AC source is capable of delivering up to 6 times of peak current verses to its maximum rated current which makes it ideal for inrush current testing.

By using advanced DSP technology, 61600 AC power source offers precision and high speed measurements such as RMS voltage, RMS current, true power, power factor, and current crest factor.

The DC and AC+DC mode extend the applications when users need DC voltage component. The 61600 AC power source also provides an external analog input, to amplify the analog signal from arbitrary signal generator. Thus, it is capable to simulate the unique waveform which observed in the field.

With the LCD display and rotary knob, the Chroma 61600 AC power source offers versatile front panel operation. Users may also control the 61600 remotely via GPIB, RS-232 or APG (Analog Programming) interface.

The self-diagnosis routine and the full protections against OPP, OCP, OVP and OTP ensure the quality and reliability for even the most demanding engineering testing and ATE application.

ORDERING INFORMATION

- 61601** : Programmable AC Source 0~300V, 15~1kHz / 500VA, 1 ϕ
- 61602** : Programmable AC Source 0~300V, 15~1kHz / 1kVA, 1 ϕ
- 61603** : Programmable AC Source 0~300V, 15~1kHz / 1.5kVA, 1 ϕ
- 61604** : Programmable AC Source 0~300V, 15~1kHz / 2kVA, 1 ϕ
- 61605** : Programmable AC Source 0~300V, 15~1kHz / 4kVA, 1 ϕ
- 61611** : Programmable AC Source 0~300V, 15~1.5kHz / 12kVA, 1 or 3 ϕ
- 61612** : Programmable AC Source 0~300V, 15~1.5kHz / 18kVA, 1 or 3 ϕ
- A615001** : Remote Interface Board for 61501~61505 and 61601~61605 (External V Input, RS-232 Interface, GPIB Interface)
- A610004** : Universal Socket Center for Model 6512/6520/6530/6560/6415/6420/6430/61500/61600/61700 Series (<15A)
- A615007** : Softpanel for Model 61500/61600/61700 Series
- A615008** : DC Noise Filter (Max. 16A)
- *A615101** : AC Source Remote Controller for 61511/61512/61611/61612
- A615103** : Parallelable power stage unit 18kVA, 1 or 3 ϕ , for 61511/61512/61611/61612
- A615104** : Input/Output terminals for parallel connecting 2 units of 61511/61512/61611/61612/A615103
- A615105** : Input/Output terminals for parallel connecting 3 units of 61511/61512/61611/61612/A615103
- *A615106** : Reverse Current Protection unit for 61511/61512/61611/61612/A615103

* Call for availability



Model 61605



Model 61611, 61612



A615103 Parallelable Power stage Unit 18KVA



A615101 AC Source Remote Controller

SPECIFICATIONS-1			
Model	61601	61602	61603
Output phase	1	1	1
Output Rating - AC			
Power/Phase	500VA	1000VA	1500VA
Voltage			
Range/Phase	150V/300V/Auto	150V/300V/Auto	150V/300V/Auto
Accuracy	0.2%+0.2%F.S.	0.2%+0.2%F.S.	0.2%+0.2%F.S.
Resolution	0.1V	0.1V	0.1V
Distortion (*1)	0.3% @ 50/60Hz 1% @ 15~1kHz (Typical)	0.3% @ 50/60Hz 1% @ 15~1kHz (Typical)	0.3% @ 50/60Hz 1% @ 15~1kHz (Typical)
Line Regulation	0.1%	0.1%	0.1%
Load Regulation (*2)	0.2%	0.2%	0.2%
Max. Current/Phase			
r.m.s.	4A/2A (150V/300V)	8A/4A (150V/300V)	12A/6A (150V/300V)
peak	24A/12A (150V/300V)	48A/24A (150V/300V)	72A/36A (150V/300V)
Frequency			
Range	DC, 15~1kHz	DC, 15~1kHz	DC, 15~1kHz
Accuracy	0.15%	0.15%	0.15%
Output Rating - DC			
Power	250W	500W	750W
Voltage	212V/424V	212V/424V	212V/424V
Current	2A/1A (212V/424V)	4A/2A (212V/424V)	6A/3A (212V/424V)
Input Rating			
Voltage Range	90~250V, 1 ϕ	90~250V, 1 ϕ	90~250V, 1 ϕ
Frequency Range	47~63Hz	47~63Hz	47~63Hz
Current	10A Max. @ 90V	18A Max. @ 90V	22A Max. @ 90V
Power Factor (*4)	0.97 Min.	0.97 Min.	0.98 Min.
Measurement			
Voltage			
Range/Phase	150V/300V	150V/300V	150V/300V
Accuracy	0.2%+0.2%F.S.	0.2%+0.2%F.S.	0.2%+0.2%F.S.
Resolution	0.1V	0.1V	0.1V
Current			
Range (peak)	24A	48A	72A
Accuracy (r.m.s.)	0.4%+0.3%F.S.	0.4%+0.3%F.S.	0.4%+0.3%F.S.
Accuracy (peak)	0.4%+0.6%F.S.	0.4%+0.6%F.S.	0.4%+0.6%F.S.
Power			
Accuracy	0.4%+0.4%F.S.	0.4%+0.4%F.S.	0.4%+0.4%F.S.
Resolution	0.1W	0.1W	0.1W
Temperature			
Operating	0~40°C	0~40°C	0~40°C
Storage	-40 ~ +85°C	-40 ~ +85°C	-40 ~ +85°C
Safety & EMC			
	CE (include EMC & LVD)		
Dimensions (H x W x D)	133.35 x 482.6 x 569.5 mm / 5.25 x 19 x 22.42 inch	133.35 x 482.6 x 569.5 mm / 5.25 x 19 x 22.42 inch	133.35 x 482.6 x 569.5 mm / 5.25 x 19 x 22.42 inch
Weight	20 kg / 44.05 lbs	20 kg / 44.05 lbs	20 kg / 44.05 lbs

Note*1 : Maximum distortion is tested on output 125VAC (150V RANGE) and 250VAC (300V RANGE) with maximum current to linear load.


Note*2 : Load regulation is tested with sinewave and remote sense.

Note*3 : Model 61605 can also use single-phase connecting method of input AC power, the maximum input current is 28A @ 190V.

Note*4 : Input power factor is tested on input 220V, full load condition.

Photovoltaic Test Equipment
Semiconductor/IC Test Equipment
LED Test Equipment
LCD/LCM Test Equipment
Video & Color Test Equipment
Optical Inspection Equipment
Power Electronics Test Equipment
Passive Component Test Instruments
Electrical Safety Test Instruments
General Purpose Test Instruments
PXI Instruments & Systems

Softpanel

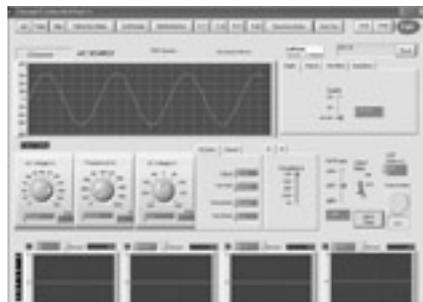

Main Operation Menu



Auto Run (for ON/OFF Burn in test)

SPECIFICATIONS-2		
Model	61604	61605
Output phase	1	1
Output Rating - AC		
Power/Phase	2000VA	4000VA
Voltage		
Range/Phase	150V/300V/Auto	150V/300V/Auto
Accuracy	0.2%+0.2%F.S.	0.2%+0.2%F.S.
Resolution	0.1V	0.1V
Distortion (*1)	0.3% @ 50/60Hz 1% @ 15~1kHz (Typical)	0.3% @ 50/60Hz 1% @ 15~1kHz (Typical)
Line Regulation	0.1%	0.1%
Load Regulation (*2)	0.2%	0.2%
Max. Current/Phase		
r.m.s.	16A/8A (150V/300V)	32A/20A (150V/300V)
peak	96A/48A (150V/300V)	192A/96A (150V/300V)
Frequency		
Range	DC, 15~1kHz	DC, 15~1kHz
Accuracy	0.15%	0.15%
Output Rating - DC		
Power	1000W	2000W
Voltage	212V/424V	212V/424V
Current	8A/4A (212V/424V)	16A/8A (212V/424V)
Input Rating		
Voltage Range	90~250V, 1ø	190~250V, 3ø (*3)
Frequency Range	47~63Hz	47~63Hz
Current	28A Max. @ 90V	14A Max. @ 190V
Power Factor (*4)	0.98 Min.	0.98 Min.
Measurement		
Voltage		
Range/Phase	150V/300V	150V/300V
Accuracy	0.2%+0.2%F.S.	0.2%+0.2%F.S.
Resolution	0.1V	0.1V
Current		
Range (peak)	96A	192A
Accuracy (r.m.s.)	0.4%+0.3%F.S.	0.4%+0.3%F.S.
Accuracy (peak)	0.4%+0.6%F.S.	0.4%+0.6%F.S.
Power		
Accuracy	0.4%+0.4%F.S.	0.4%+0.4%F.S.
Resolution	0.1W	0.1W
Temperature		
Operating	0~40°C	0~40°C
Storage	-40 ~ +85°C	-40 ~ +85°C
Safety & EMC		
Dimensions (H x W x D)	133.35 x 482.6 x 569.5 mm / 5.25 x 19 x 22.42 inch	266.7 x 482.6 x 569.5 mm / 10.5 x 19 x 22.42 inch
Weight	20 kg / 44.05 lbs	41 kg / 90.31 lbs

Note*1 : Maximum distortion is tested on output 125VAC (150V RANGE) and 250VAC (300V RANGE) with maximum current to linear load.

Note*2 : Load regulation is tested with sinewave and remote sense.

Note*3 : Model 61605 can also use single-phase connecting method of input AC power, the maximum input current is 28A @ 190V.

Note*4 : Input power factor is tested on input 220V, full load condition.

SPECIFICATIONS-3				
Model	61611	61612	61611+A615103	61612+A615103
Output Phase	1 or 3 selectable			
Output Rating-AC				
Power	12kVA	18kVA	30kVA	36kVA
Each phase	4kVA	6kVA	10kVA	12kVA
Voltage				
Range	0~150V/0~300V			
Accuracy	0.2%+0.2%F.S.			
Resolution	0.1 V			
Distortion *1	0.3% @50/60Hz, 1%@15~1kHz, 1.5%@>1kHz			
Line regulation	0.1%			
Load regulation *2	0.2%			
Temp. coefficient	0.02% per degree from 25°C			
Max Current (1-phase mode)				
RMS	96A / 48A	144A / 72A	240A / 120A	288A / 144A
Peak (CF=4)	384A / 192A	576A / 288A	960A / 480A	1152A / 576A
Max Current (each phase in 3-phase mode)				
RMS	32A / 16A	48A / 24A	80A / 40A	96A / 48A
Peak (CF=4)	128A / 64A	192A / 96A	320A / 160A	384A / 192A
Frequency				
Range	DC, 15-1.5kHz			
Accuracy	0.15%			
Phase				
Range	0 ~ 360°			
Resolution	0.3°			
Accuracy	<0.8°@50/60Hz			
DC Output (1-phase mode)				
Power	6kW	9kW	15kW	18kW
Voltage	212V / 424V	212V / 424V	212V / 424V	212V / 424V
Current	48A / 24A	72A / 36A	120A / 60A	144A / 72A
DC Output (3-phase mode)				
Power	2kW	3kW	5kW	6kW
Voltage	212V / 424V	212V / 424V	212V / 424V	212V / 424V
Current	16A / 8A	24A / 12A	40A / 20A	48A / 24A
Input AC Power (each phase)				
AC type	3-phase, Delta or Y connecting			
Voltage range *3	190-250V (Delta: L-L, Y: L-N)			
Frequency range	47-63 Hz			
Max. current	Delta: 80A Y: 70A	Delta: 120A Y: 90A	Delta: 200A Y: 160A	Delta: 240A Y: 180A
Measurement				
Voltage				
Range	150V / 300V			
Accuracy	0.2%+0.2%F.S.			
Resolution	0.1 V			
Current				
Range	128/32/8 A peak	192/48/12 A peak	320/80/20 A peak	384/96/24 A peak
Accuracy (rms)	0.4%+0.3%F.S.			
Accuracy (peak)	0.4%+0.6%F.S.			
Resolution	0.1 A			
Power				
Accuracy	0.4%+0.4% F.S			
Resolution	0.1 W			
Efficiency *4	0.75 (Typical)			
Protect	UVP, OCP, OPP, OTP, FAN			
Interface	GPIB, RS-232, USB, Ethernet (Standard)			
Temperature				
Operation	0°C~40°C			
Storage	-40°C~85°C			
Humidity	30%~90%			
Safety & EMC	CE			
Dimensions (H x W x D)	1163 x 546 x 700 mm / 45.78 x 21.5 x 27.56 inch*5		1163 x 546 x 700 mm / 45.78 x 21.5 x 27.56 inch x 2 units*5	
Weight	229.4 kg / 505.29 lbs	242.4 kg / 533.92 lbs	480 kg / 1057.27 lbs	495 kg / 1090.31 lbs

Note*1 : Maximum distortion is tested on output 125VAC (150V RANGE) and 250VAC (300V RANGE) with maximum current to linear load.

Note*2 : Load regulation is tested with sine wave and remote sense.

Note*3 : Models with 277VLN/480VLL(5 Wires) AC input voltage are available upon request.

Note*4 : Efficiency is tested on input voltage 230V.

Note*5 : Dimensions (HxWxD) with wheel sets : 1246 x 546 x 700mm / 49.05 x 21.5 x 27.56 inch.

Photovoltaic Test Equipment
Semiconductor/IC Test Equipment
LED Test Equipment
LCD/LCM Test Equipment
Video & Color Test Equipment
Optical Inspection Equipment
Power Electronics Test Equipment
Passive Component Test Instruments
Electrical Safety Test Instruments
General Purpose Test Instruments
PXI Instruments & Systems